

# WARNING

WHEN USING ELECTRIC TOOLS, BASIC SAFETY PRECAUTIONS SHOULD ALWAYS BE FOLLOWED TO REDUCE THE RISK OF FIRE, ELECTRICAL SHOCK AND PERSONAL INJURY. READ THE FOLLOWING RULES FOR SAFE OPERATION.


## READ ALL SAFETY INSTRUCTIONS:

1. KNOW YOUR TOOL. Read this owner's manual carefully. Learn the applications and limitations as well as the specific potential hazards peculiar to this tool.
2. DO NOT TOUCH the nozzle area or melted glue.
3. KEEP WORK AREA CLEAN. Cluttered areas and benches invite accidents.
4. AVOID DANGEROUS ENVIRONMENT. Don't use the tool in damp or wet locations or expose it to rain. Keep work area well lighted. Do not use in presence of flammable liquids or gasses.
5. GUARD AGAINST ELECTRIC SHOCK. Prevent body contact with grounded surfaces like pipes and appliances.
6. EXTENSION CORDS. Inspect extension cords periodically and replace if damaged.
7. KEEP CHILDREN AWAY. Do not let visitors touch tool or extension cord; keep them a safe distance from the work area.
8. STORE IDLE TOOLS. When not in use, the tool should be stored in a dry, locked-up place—out of reach of children.
9. USE SAFETY GOGGLES or a face shield when using the tool.
10. DON'T ABUSE CORD. Never carry the tool by the cord or yank the cord to disconnect from plug or receptacle.
11. DON'T OVERREACH. Keep proper footing and balance at all times.
12. MAINTAIN TOOLS WITH CARE. Keep them clean and in good working order for best and safest performance. Inspect tool cord periodically. Keep handle dry, clean, and free from oil and grease.
13. DISCONNECT TOOLS when not in use. Do not leave a tool plugged in overnight.
14. AVOID ACCIDENTAL GLUE DISCHARGE. Don't carry a plugged-in tool with your finger on trigger, when loading and when not in use.
15. STAY ALERT. Watch what you are doing. Use common sense. Do not operate tool when you are tired.
16. DO NOT USE OUTDOORS. Tool is not designed for outdoor use.


SAVE THESE INSTRUCTIONS


## STANLEY® OWNER'S MANUAL

### 69-600 PROFESSIONAL™ TRIGGER FEED GLUE GUN

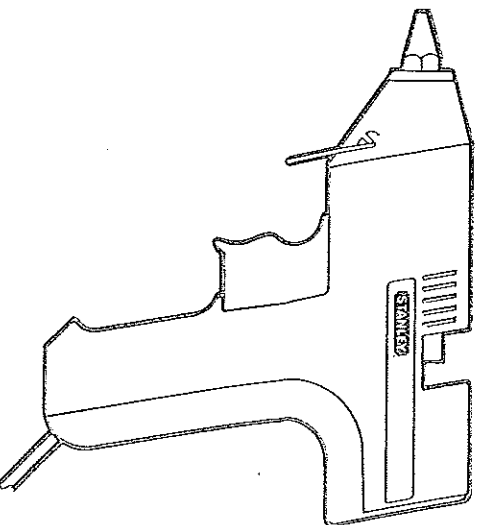

### 69-606 HANDYMAN® THUMB FEED GLUE GUN

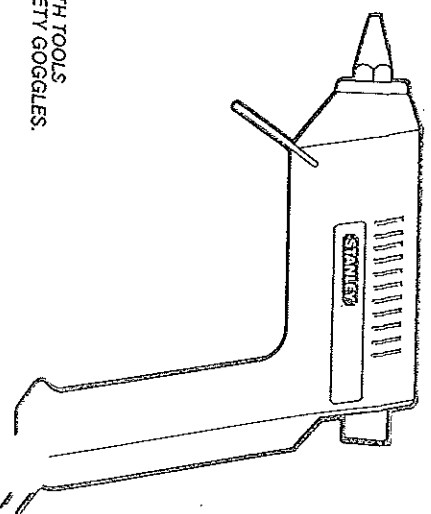

 WORK SAFELY WITH TOOLS  
BY WEARING SAFETY GOGGLES.

MADE IN U.S.A.

© 1997 STANLEY POWER TOOLS

## ASSEMBLY

- Snap wire stand into holes located in nose of gun.
- **PROFESSIONAL™**—Alternate wire stand holes are located in the rear of the gun. This permits tool to be hung.

## GETTING STARTED

- Plug tool into 120 VAC outlet.
- Insert Glue Sticks through rear opening of the tool. (Note: Two 4" sticks are required on initial use.)

- The gun will take approximately 3–4 minutes to heat.

**WARNING: DO NOT TOUCH THE NOZZLE AREA OR MELTED ADHESIVE. OPERATING TEMPERATURE OF THE TOOL IS 380 DEGREES.**

## DOING YOUR PROJECT

- **PROFESSIONAL™**—Glue is fed by simply pulling the trigger. Amount of glue is determined by how far the trigger is pulled.
- **HANDYMAN®**—Glue is fed by thumb pressure on the end of glue stick. Amount of glue fed is determined by thumb pressure.
- Reload the tool when the glue stick no longer extends from the rear opening.

## AFTER THE PROJECT IS COMPLETED

- The tool should be unplugged after use or if it will not be used for an extended period of time.
- Glue can be stored indefinitely in the unheated glue gun and be remelted by simply heating up the tool.
- **DO NOT REMOVE** unused glue from tool! **DAMAGE** could be caused to internal parts of the gun.

## SELECTING THE RIGHT GLUE

- Stanley Hot Melt Glue bonds porous surfaces such as paper, wood, plastic, ceramics and some metals.
- For best results, we recommend the use of Stanley Glues only. They have been specifically formulated for the operating temperatures of the Stanley Glue Guns.

STANLEY GLUE	SUGGESTED USES
GENERAL PURPOSE CLEAR	Bonds most porous materials. Sets in 30–60 seconds.
WHITE CAULK	Flexible waterproof seal. Sets in 30–60 seconds.
WOOD GLUE	Excellent wood bonding. Low viscosity. Sets in 30–45 seconds.
PLASTIC GLUE	Great for plastics. Sets in 45–60 seconds.

## WORKING WITH STANLEY GLUES

- The bond will have approximately 90% of its strength within one minute. This eliminates the need for clamps or other holding devices.
- Working time of glues can be extended by applying the glue in large drops or shortened by applying in a thin line.
- Bond small areas. Glue may set up prior to completion of project if too large an area is attempted.
- Bond strength is improved if surfaces are warmed before glue application.
- Some materials can be damaged by hot glue or nozzle. Test small area of object to be repaired.
- **DO NOT** use to glue areas exposed to 140 degrees or above temperatures. Glue will soften.
- **DO NOT** use as a substitute for nails or other structural fasteners in load bearing applications.

## INTERCHANGEABLE NOZZLES

- Both the HANDYMAN® and PROFESSIONAL™ glue guns feature interchangeable nozzles.
- For easy removal, the nozzle should be removed from a heated gun using a wrench.

**WARNING: DO NOT TOUCH THE NOZZLE AREA OR MELTED ADHESIVE. OPERATING TEMPERATURE OF THE TOOL IS 380 DEGREES.**

- For best results, nozzle should be replaced every six months on frequently used guns to insure proper glue shut off and easy feeding.

STANLEY NOZZLES	SUGGESTED USES
STANDARD	Suitable for most applications.
SPREADER	For use where a wider glue bead is needed.
HYPODERMIC	For hard to reach areas such as grooves, cracks and crevices.

### LIMITED TWO YEAR WARRANTY

Stanley Tools warrants this product to the original retail purchaser for two years from the date of purchase against any defects that are due to faulty material or workmanship. Return the complete unit to the participating retailer for free replacement. Proof of purchase is required. The complete tool may also be returned to the **STANLEY TOOLS SERVICE CENTER, 4380 OLD ROBERTS ROAD, COLUMBUS, OHIO, 42338**, transportation prepaid, for free replacement or repair at Stanley Tools' option.

This warranty does not apply where repairs have been made or attempted by others, where the tool has been abused, misused or improperly maintained, where alterations have been made to the tool, or where repairs are required because of normal wear. This warranty does not apply to accessories.

**THIS WARRANTY IS IN LIEU OF ALL OTHER EXPRESS WARRANTIES. ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE IS LIMITED TO THE DURATION OF THIS WARRANTY.**

**IN NO EVENT SHALL STANLEY TOOLS BE LIABLE FOR CONSEQUENTIAL DAMAGES.** Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. Some states do not allow limitations on how long an implied warranty lasts, so the above limitation may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state. Should you have any questions contact **STANLEY TOOLS CUSTOMER SERVICE, 600 MYRTLE STREET, NEW BRITAIN, CT 06050.**